


BRIDAS



Referencia	Longitud mm	Ancho mm	Diámetro máximo del haz mm	Resistencia tracción kg
32510	100	2,5	22	8,1
32514	140		33	
32516	160		38	
32520	200		53	
33612	120	3,6	30	18,2
33614	140		33	
33618	180		44	
33620	200		53	
33625	250		65	
33630	300		76	
34820	200	4,8	50	22,2
34825	250		60	
34830	300		76	
34837	370		100	
34843	430		110	
34855	550		145	
37625	250	7,6	65	54,4
37630	300		76	
37643	430		129	
37653	530		140	
39053	530	9,0	140	79.4
39071	710		190	
39091	912		263	
39010	1020		295	
39015	1530		460	

* añadir -1 Para color negro

BRIDAS BANDERA

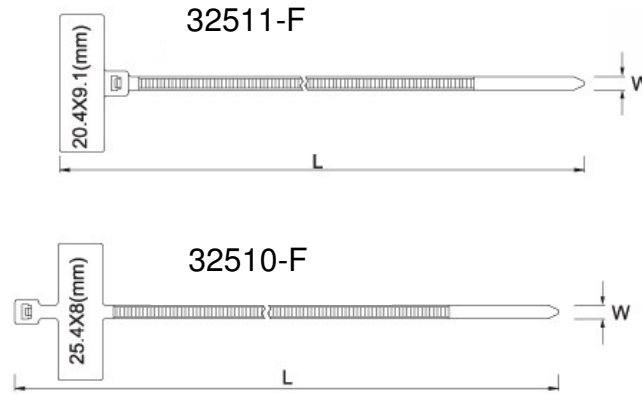

Referencia	Longitud (mm) L	Ancho (mm) W	El diámetro máximo del haz mm	Resistencia a la tracción kg
32511-F	112	2,5	18	8,1
32510-F	100	2,5	18	8,1

BASE ADHESIVA



Color standard Blanco
Para negro añadir -1


Referencia	Longitud (mm) L	Ancho (mm) W	Ancho máximo de brida (mm)
312525	25	25	5
311919	19	19	5

TACO PARED



Referencia	longitud L mm	Ancho W mm	Broca (mm)
313508	35	8	6

BASE TORNILLO

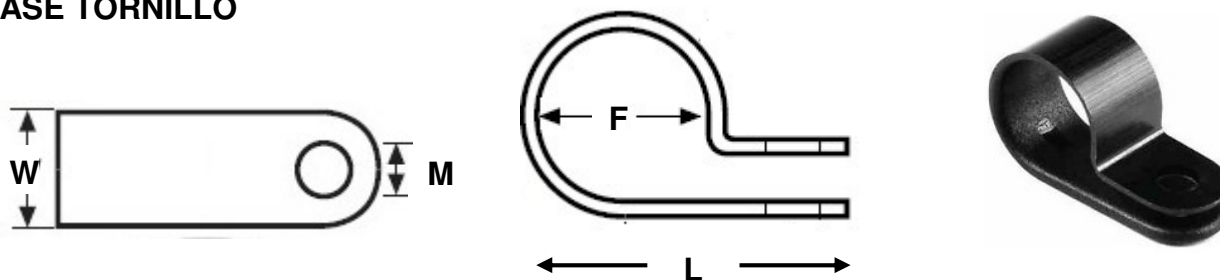

Colores Blanco y Negro

Referencia	M Métrica tornillo	W Ancho mm	L Longitud mm	F Diámetro mm
BT- 48	4	10.1	20	4.8
BT-64	4	10.1	22	6.35
BT-95	4	11.8	25	9.5
BT-127	4	11.8	30	12.7
BT-19	4	12.0	35	19
BT-25	4	12.1	44	25

MARCADORES DE CABLE



Referencia	Para diámetro	Marca
MC-1	1 – 3	A-Z,0-9,+,-,Tierra
MC-2	2.5 – 4	A-Z,0-9,+,-,Tierra
MC-3	4 - 8	A-Z,0-9,+,-,Tierra